

AD-A071 457 ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND DOVER--ETC F/G 19/1  
DYNAMIC MODEL OF WATER DELUGE SYSTEM FOR PROPELLANT FIRES.(U)  
MAY 79 J P CALTAGIRONE

UNCLASSIFIED

ARLCO-MR-78008

SBIE -AD-E400 315

NL

| OF |  
AD  
A071457



END  
DATE  
FILMED  
9-79  
DOC



DA071457

12  
New LEVEL III

AD


AD-E400 315

MEMORANDUM REPORT ARLCD-MR-78008

**DYNAMIC MODEL OF WATER DELUGE SYSTEM  
FOR PROPELLANT FIRES**

JOSEPH P. CALTAGIRONE

MAY 1979

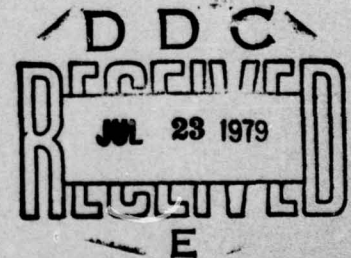

**US ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND  
LARGE CALIBER  
WEAPON SYSTEMS LABORATORY  
DOVER, NEW JERSEY**

APPROVED FOR PUBLIC RELEASE: DISTRIBUTION UNLIMITED.

79 06 25 063

**The views, opinions, and/or findings contained in this report are those of the author(s) and should not be construed as an official Department of the Army position, policy or decision, unless so designated by other documentation.**

**Destroy this report when no longer needed. Do not return it to the originator.**



UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER Memorandum Report ARLCD-MR-78008	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) DYNAMIC MODEL OF WATER DELUGE SYSTEM FOR PROPELLANT FIRES		5. TYPE OF REPORT & PERIOD COVERED
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) Joseph P. Caltagirone		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS ARRADCOM, LCWSL Manufacturing Technology Div (DRDAR-LCM-SP) Dover, NJ 07801		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS ARRADCOM, TSD STINFO (DRDAR-TSS) Dover, NJ 07801		12. REPORT DATE MAY 1979
		13. NUMBER OF PAGES 19
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) ARRADCOM, LCWSL Manufacturing Technology Div (DRDAR-LCM-SP) Dover, NJ 07801		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report)  Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Water deluge system                      Explosive/propellant fire hazard Propellant fires                              Fire hazard Dynamic modeling Model law		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) X Since the conventional water deluge system is ineffective in extinguishing propellant/explosive fires, a program was undertaken to develop a deluge system able to withstand the pressures involved in a propellant or explosive fire and to extinguish it before a detonation or extreme hazard occurs. Testing a full-scale water deluge system is costly; therefore, a model law was developed in order to test scaled-down systems.		

DD FORM 1 JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

79 06 25 063

# ACKNOWLEDGMENTS

The author wishes to express his sincere appreciation to Dr. W. E. Baker of Southwest Research Institute and Messrs. I. Forsten and R. Rindner of ARRADCOM for their valuable contributions and assistance in the preparation of this report.

Accession For	
NTIS GRA&I	<input checked="checked" type="checkbox"/>
DDC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification _____	
By _____	
Distribution/ _____	
Availability Codes	
Dist.	Avail and/or special
<i>R</i>	

## TABLE OF CONTENTS

	Page No.
Introduction	1
Development of the Model	1
Parameters and Assumptions	1
The Model	5
Conclusions and Recommendations	7
References	8
Distribution List	13
Tables	
1 Parameters for water deluge system model	9
2 Pi terms for water deluge system model	10
Figures	
1 Water deluge system for propellant hopper	11
2 Schematic of hopper deluge system	12

## INTRODUCTION

A conventional water deluge system is ineffective in extinguishing propellant/explosive fires, since it can be destroyed by an accidental detonation. A water deluge system which can withstand accidental detonation has been successfully deployed in extinguishing the resulting fires. However, testing and proving-out the effectiveness of the deluge system against a variety of propellants/explosives in different physical environments is expensive. The development of a model for testing will reduce this cost and make it possible to test for the various types of propellants/explosives and configurations present in manufacture and storage.

The scope of this memorandum is limited to the modeling of a propellant hopper set-up.

This model was initially developed as a project for a course, "Modeling in Engineering Dynamics," given by Southwest Research Institute at ARRADCOM, Dover, NJ. It has since been refined.

## DEVELOPMENT OF THE MODEL

### Parameters and Assumptions

Before a model can be developed, all pertinent parameters must be known. In modeling the water deluge system, the system's parameters (table 1) were taken into account, and the following assumptions were made:

1. Propellant being processed in hopper is bulk, single perforated.
2. Ignition of propellant is at bottom of hopper (worst case).
3. Water flow through pipe is neglected; response is taken as water leaves nozzle.
4. Nozzle spray is sufficient to cover hopper.
5. Constant line pressure.

In choosing the parameters, the characteristics of the pipe (that is, the flow characteristics) were neglected. This can be done since the only significant characteristics to be considered are the pressure and the pattern with which the water leaves the nozzle.



A hopper of single-perforated propellant was chosen to simplify the model, since multi-perforated propellant has more surface area and exhibits different characteristics.

#### Development of PI Terms

From table 1, there are three dimensionless parameters. These are the first three pi terms:

$$\pi_1 = d_n$$

$$\pi_2 = d_h$$

$$\pi_3 = d_g$$

Also, from the remaining parameters, we can create an equation of dimensional homogeneity:

$$F^\circ L^\circ T^\circ \Theta^\circ \stackrel{d}{=} v^{a_1} t_e^{a_2} t_o^{a_3} P_\omega^{a_4} P_r^{a_5} \Delta^{a_6} \rho^{a_7} V^{a_8} H^{a_9} \ell^{a_{10}} \theta_o^{a_{11}}$$

or, substituting in each parameter's fundamental dimensions, we obtain:

$$F^\circ L^\circ T^\circ \Theta^\circ \stackrel{d}{=} (L^3/T)^{a_1} (T)^{a_2} (T)^{a_3} (F/L^2)^{a_4} \left(\frac{F}{L^2 T}\right)^{a_5} (\Theta)^{a_6}$$

$$(FT^2/L^4)^{a_7} (L^3)^{a_8} (L^2/T^2)^{a_9} (L)^{a_{10}} (\Theta)^{a_{11}}$$

These terms are then placed into a matrix:

	$a_1$	$a_2$	$a_3$	$a_4$	$a_5$	$a_6$	$a_7$	$a_8$	$a_9$	$a_{10}$	$a_{11}$
	$v$	$t_e$	$t_0$	$P_\omega$	$\dot{P}_r$	$\Delta$	$\rho$	$V$	$H$	$\ell$	$\Theta_0$
F	0	0	0	1	1	0	1	0	0	0	0
L	3	0	0	-2	-2	0	-4	3	2	1	0
T	-1	1	1	0	-1	0	2	0	-2	0	0
$\Theta$	0	0	0	0	0	1	0	0	0	0	1

Rearrange matrix:

	$a_4$	$a_{10}$	$a_3$	$a_6$	$a_5$	$a_1$	$a_7$	$a_8$	$a_9$	$a_2$	$a_{11}$
	$P_\omega$	$\ell$	$t_0$	$\Delta$	$\dot{P}_r$	$v$	$\rho$	$V$	$H$	$t_e$	$\Theta_0$
F	1	0	0	0	1	0	1	0	0	0	0
L	-2	1	0	0	-2	3	-4	3	2	0	0
T	0	0	1	0	-1	-1	2	0	-2	1	0
$\Theta$	0	0	0	1	0	0	0	0	0	0	1

Add two times row 1 to row 2 and the identity submatrix is obtained. This indicates that the rank of the matrix is 4 and thus 11-4 or 7 pi terms will result.

	$a_4$	$a_{10}$	$a_3$	$a_6$	$a_5$	$a_1$	$a_7$	$a_8$	$a_9$	$a_2$	$a_{11}$
	$P_\omega$	$\ell$	$t_0$	$\Delta$	$\dot{P}_r$	$v$	$\rho$	$V$	$H$	$t_e$	$\Theta_0$
F	1	0	0	0	1	0	1	0	0	0	0
L	0	1	0	0	0	3	-2	3	2	0	0
T	0	0	1	0	-1	-1	2	0	-2	1	0
$\Theta$	0	0	0	1	0	0	0	0	0	0	1

This matrix yields four simultaneous equations:

$$F: a_4 = -a_5 - a_7$$

$$L: a_{10} = -3a_1 + 2a_7 - 3a_8 - 2a_9$$

$$T: a_3 = a_5 + a_1 - 2a_7 + 2a_9 - a_2$$

$$\Theta: a_6 = -a_{11}$$

Substituting back into the equation of dimensional homogeneity:

$$F^\circ L^\circ T^\circ \Theta^\circ \stackrel{d}{=} v^{a_1} t_e^{a_2} t_o^{a_5 + a_1 - 2a_7 + 2a_9 - a_2} p_\omega^{-a_5 - a_7} \dot{p}_r^{a_5} \Delta^{-a_{11}}$$

$$V^{a_8} H^{a_9} l^{-3a_1 + 2a_7 - 3a_8 - 2a_9} \theta_o^{a_{11}}$$

Collecting terms of like exponents yields the remaining terms:

$$a_1: \pi_4 = \frac{vt_o}{l^3}$$

$$a_2: \pi_5 = t_e/t_o$$

$$a_5: \pi_6 = \frac{t_o \dot{p}_r}{p_\omega}$$

$$a_7: \pi_7 = \frac{\rho l^2}{p_\omega t_o^2}$$

$$a_8: \pi_8 = V/l^3$$

$$a_9: \pi_9 = \frac{t_o^2 H}{l^2}$$

These pi terms can be expressed as a set of functions:

$$\left. \begin{array}{l} \frac{t_e}{t_o} \\ \frac{t_o^2 H}{\ell^2} \\ \Delta/\theta_o \end{array} \right\} f_i (d_n, d_h, d_g, \frac{vt_o}{\ell^3}, \frac{t_o \dot{p}_r}{p_\omega}, \frac{\rho \ell^2}{p_\omega t_o^2}, \frac{V}{\ell^3})$$

### The Model

Referring to the list of pi terms in table 2, the model can be derived and the appropriate scale factors determined. These must be followed to fully satisfy the model criteria. The set of pi terms in table 2 constitutes the model law. For strict adherence to the law, all nine dimensionless groups should remain invariant between the model and prototype. Pi terms 1 to 3 denote geometric similarity; in other words, the geometry must be the same in the model and in the prototype. The other pi terms result in the following relationships between scale factors:

$$\pi_4: \lambda_v \lambda_{t_o} = \lambda_\ell^3 \quad (1)$$

$$\pi_5: \lambda_{t_e} = \lambda_{t_o} \quad (2)$$

$$\pi_6: \lambda_{t_o} \lambda_{\dot{p}_r} = \lambda_{p_\omega} \quad (3)$$

$$\pi_7: \lambda_\rho \lambda_\ell^2 = \lambda_{p_\omega} \lambda_{t_o}^2 \quad (4)$$

$$\pi_8: \lambda_V = \lambda_\ell^3 \quad (5)$$

$$\pi_9: \lambda_{t_o}^2 \cdot \lambda_H = \lambda_\ell^2 \quad (6)$$

$$\pi_{10}: \lambda_\Delta = \lambda_{\theta_o} \quad (7)$$

These relationships may be easier to satisfy if we set one scale factor arbitrarily, say  $\lambda_\ell = \lambda$  (any scale factor). Using the same propellant in the model as is used in the prototype,  $\lambda_\rho = \lambda_H = 1$ . Also, if we keep the water pressure and the initial temperature the same, i.e.,  $\lambda_{p_w} = \lambda_{\theta_0} = 1$ , then:

$$\text{from } \pi_7 \quad ; \quad \lambda_{t_o} = \lambda$$

$$\text{from } \pi_5 \quad : \quad \lambda_{t_e} = \lambda$$

$$\text{from } \pi_{10} \quad : \quad \lambda_\Delta = 1$$

$$\text{from } \pi_4 \quad : \quad \lambda_v = \lambda^2$$

$$\text{from } \pi_6 \quad : \quad \lambda_{\bar{p}_r} = 1/\lambda$$

$$\text{from } \pi_8 \quad : \quad \lambda_V = \lambda^3$$

If a half-scale model is selected, then:

$$\lambda_\ell = 1/2 \qquad \lambda_{p_w} = 1$$

$$\lambda_{t_o} = 1/2 \qquad \lambda_\rho = 1$$

$$\lambda_{t_e} = 1/2 \qquad \lambda_H = 1$$

$$\lambda_\Delta = 1 \qquad \lambda_V = 1$$

$$\lambda_v = 1/4$$

$$\lambda_{\bar{p}_r} = 2$$

Substituting these scale factors back into the required relationships between scale factors (equations 1 through 7) serves as proof that the model law has been satisfied.



## CONCLUSIONS AND RECOMMENDATIONS

The model law for the deluge system developed in this memorandum will permit scaled-down systems to be tested, reduce costs, and/or decrease the number of tests. This model may be fabricated for testing with relative ease.

It is recommended that this model and others for different types of deluge systems be adopted for use in developing scaled-down models.

## REFERENCES

1. W. E. Baker, P. S. Westine, and F. T. Dodge, Similarity Methods in Engineering Dynamics, Spartan Books, 1973
2. J. W. Gehring, R. N. Rindner, and W. Seals, "Development of a Water Deluge System to Extinguish M-1 Propellant Fires", ARRADCOM Contractor Report, ARLCD-CR-78024, Dover, NJ, September 1978
3. "Safety, Pollution Abatement, and Conservation of Energy Review", Special Publication ARLCD-SP-77001, ARRADCOM, Dover, NJ, May 1977

Table 1. Parameters for water deluge system model

Parameter	Symbol	Dimensions
Water flow rate	$v$	$L^3/T$
Time to detection	$t_o$	$T$
Extinguishment time	$t_e$	$T$
Water pressure	$P_w$	$F/L^2$
Pressure rise rate of propellant	$\dot{P}_r$	$\frac{F}{L^2T}$
Change in temperature	$\Delta$	$\theta$
Nozzle spray pattern	$d_n$	-
Hopper shape	$d_h$	-
Packing density of propellant	$\rho$	$\frac{FT^2}{L^4}$
Volume of propellant	$V$	$L^3$
Heat of combustion	$H$	$\frac{L^2}{T^2}$
Grain shape	$d_g$	-
Spray distance	$l$	$L$
Initial temperature of propellant	$\theta_o$	$\theta$

Table 2. Pi terms for water deluge system model

$\pi_1 = d_h$	}	Geometric similarity
$\pi_2 = d_h$		
$\pi_3 = d_g$		
$\pi_4 = \frac{vt_o}{l^3}$		Water flow
$\pi_5 = t_e/t_o$		Extinguishment response
$\pi_6 = \frac{t_o \dot{P}_r}{P_w}$		
$\pi_7 = \frac{\rho l^2}{P_w t_o^2}$		
$\pi_8 = V/l^3$		
$\pi_9 = \frac{t_o^2 H}{l^2}$		Fire intensity response
$\pi_{10} = \frac{\Delta}{\theta_o}$		Temperature ratio

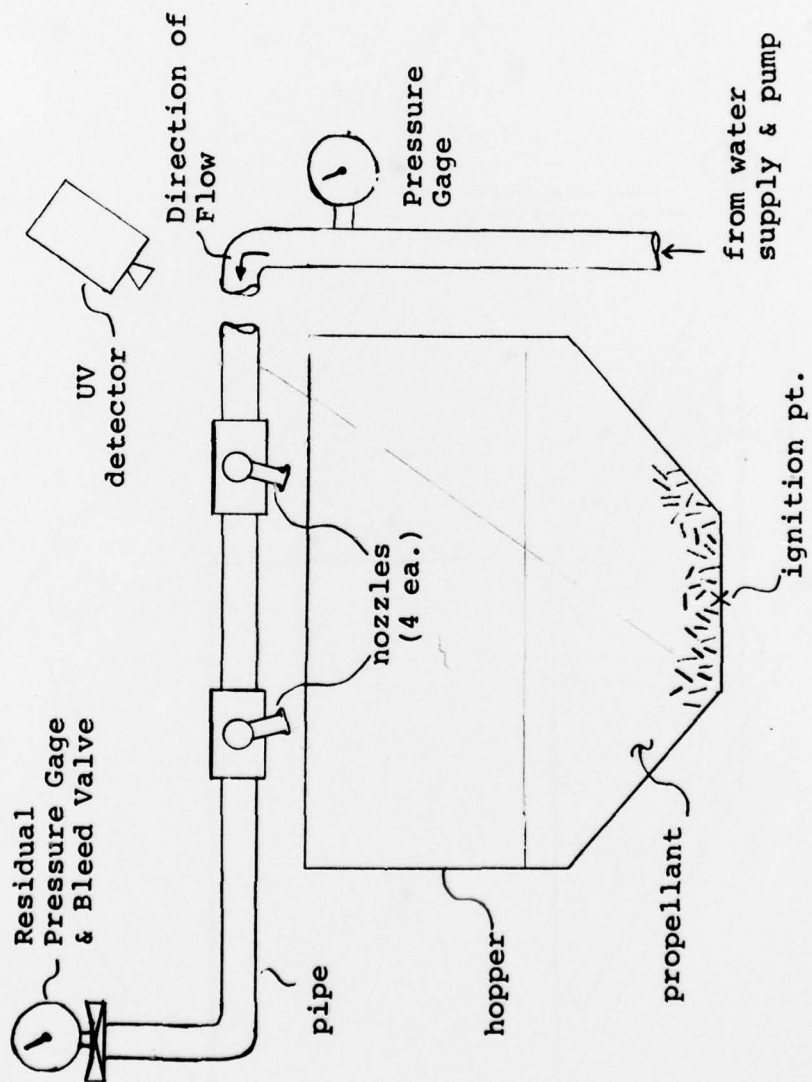


Figure 1. Water deluge system for propellant hopper.



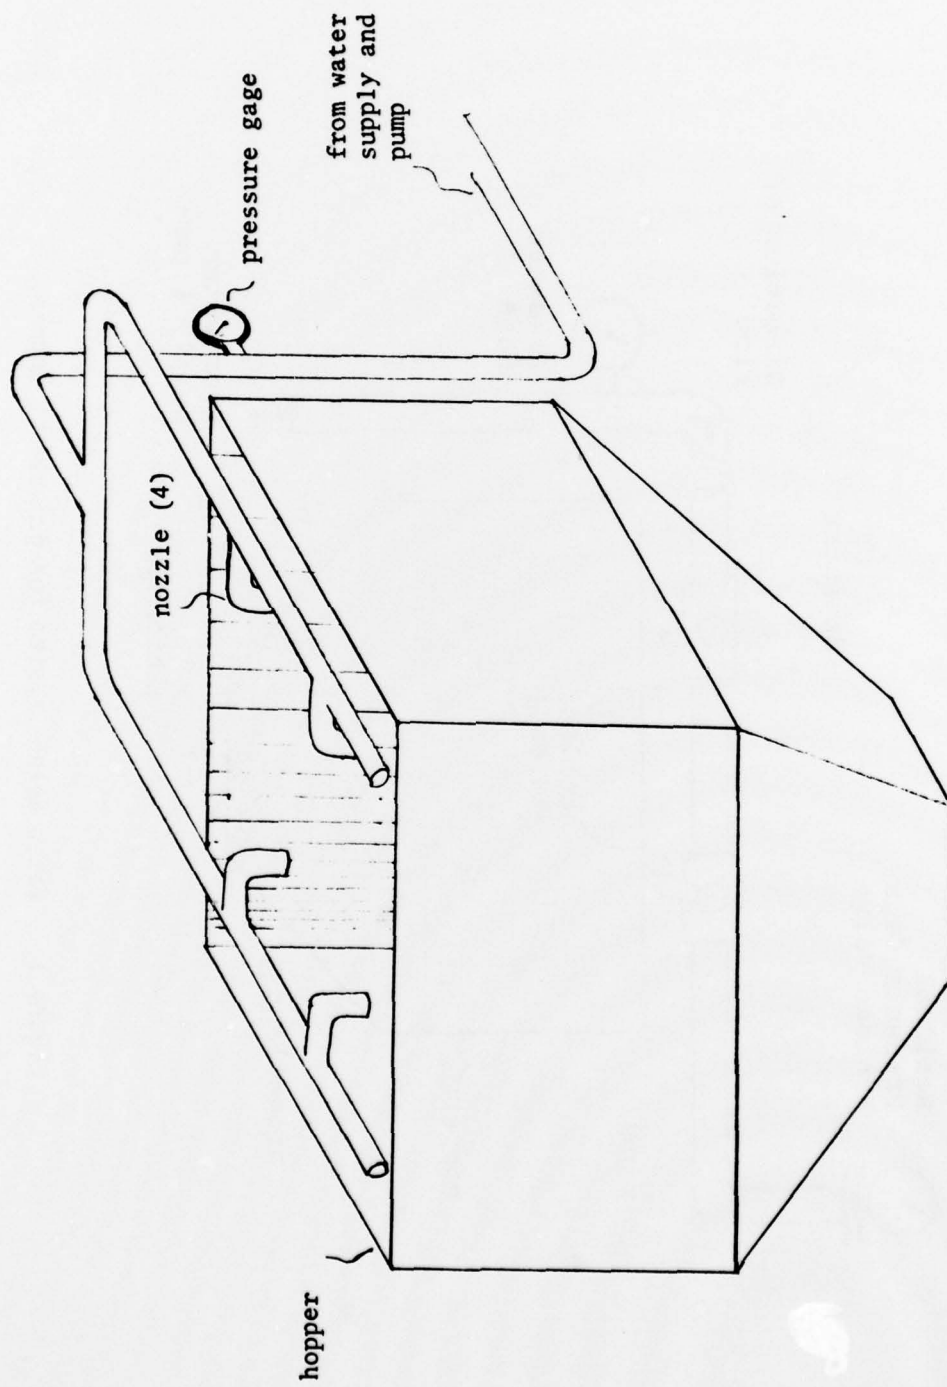


Figure 2. Schematic of hopper deluge system.

## DISTRIBUTION LIST

### Commander

US Army Armament Research & Development Command

ATTN: DRDAR-CG  
DRDAR-LC  
DRDAR-LCM  
DRDAR-LCM-S (15)  
DRDAR-SF  
DRDAR-TSS (5)  
DRDAR-LCU-P

Dover, NJ 07801

### Commander

US Army Materiel Development & Readiness Command

ATTN: DRCDE  
DRCIS-E  
DRCPA-E  
DRCPP-I  
DRCDI  
DRCSG-S

5001 Eisenhower Avenue  
Alexandria, VA 22333

### Commander

USDRC Installations and Services Agency

ATTN: DRCIS-RI-IU  
DRCIS-RI-IC

Rock Island, IL 61299

### Commander

US Army Armament Materiel Readiness Command

ATTN: DRSAR-IR (2)  
DRSAR-IRC  
DRSAR-ISE (2)  
DRSAR-IRC-E  
DRSAR-PDM  
DRSAR-LC (2)  
DRSAR-ASF (2)  
DRSAR-SF (3)  
DRSAR-LEP-L

Rock Island, IL 61299

Chairman  
Department of Defense Explosives Safety Board  
Hoffman Building 1, Room 856C  
2461 Eisenhower Avenue  
Alexandria, VA 22331

Project Manager for Munitions Production  
Base Modernization and Expansion  
US Army Materiel Development & Readiness Command  
ATTN: DRCPM-PBM-LA  
DRCPM-PBM-SF  
DRCPM-PBM-EP  
Dover, NJ 07801

Director  
Ballistic Research Laboratory  
ARRADCOM  
ATTN: DRDAR-BLE, C. Kingery (2)  
Aberdeen Proving Ground, MD 21010

Defense Documentation Center (12)  
Cameron Station  
Alexandria, VA 22314

Commander  
US Army Construction Engineering  
Research Laboratory  
ATTN: CERL-ER  
Champaign, IL 61820

Office, Chief of Engineers  
ATTN: DAEN-MCZ-E  
Washington, DC 20314

US Army Engineer District, Huntsville  
ATTN: Construction Division-HAD-ED (2)  
P.O. Box 1600 West Station  
Huntsville, AL 35807

Commander  
Indiana Army Ammunition Plant  
ATTN: SARIN-OR  
SARIN-SF  
Charlestown, IN 47111

Commander  
Kansas Army Ammunition Plant  
ATTN: SARKA-CE  
Parsons, KS 67537

Commander  
Lone Star Army Ammunition Plant  
ATTN: SARLS-IE  
Texarkana, TX 57701

Commander  
Milan Army Ammunition Plant  
ATTN: SARMI-S  
Milan, TN 38358

Commander  
Radford Army Ammunition Plant  
ATTN: SARRA-IE  
Radford, VA 24141

Commander  
Badger Army Ammunition Plant  
ATTN: SARBA  
Baraboo, WI 53913

Commander  
Holston Army Ammunition Plant  
ATTN: SARHO-E  
Kingsport, TN 37662

Commander  
Iowa Army Ammunition Plant  
ATTN: SARIO-A  
Middletown, IA 52638

Commander  
Joliet Army Ammunition Plant  
ATTN: SARJO-SS-E  
Joliet, IL 60436

Commander  
Longhorn Army Ammunition Plant  
ATTN: SARLO-O  
Marshall, TX 75670

Commander  
Louisiana Army Ammunition Plant  
ATTN: SARLA-S  
Shreveport, LA 71102

Commander  
Newport Army Ammunition Plant  
ATTN: SARNE-S  
Milan, TN 38358

Commander  
Pine Bluff Arsenal  
ATTN: SARPE-ETS  
Pine Bluff, AR 71601

Commander  
Sunflower Army Ammunition Plant  
ATTN: SARSU-O  
Lawrence, KS 66044

Commander  
Volunteer Army Ammunition Plant  
ATTN: SARVO-T  
Chattanooga, TN 34701

Weapon System Concept Team/CSL  
ATTN: DRDAR-ACW  
Aberdeen Proving Ground, MD 21010

Technical Library  
ATTN: DRDAR-CLJ-L  
Aberdeen Proving Ground, MD 21010

Technical Library  
ATTN: DRDAR-TSB-S  
Aberdeen Proving Ground, MD 21005

Benet Weapons Laboratory  
Technical Library  
ATTN: DRDAR-LCB-TL  
Watervliet, NY 12189